



Single-phase transformers with UI alternately stacked laminator are produced with electrical output power and dimensions according to table below. Voltage from 1V up to 1000V in any combination. Covering IP 00.

Style: vertical, terminal blocks


Other variations are available upon discussion with the engineering department.

Einphasentrafos mit Standardblech in Form UI werden in Leistung und Abmessung nach der Tabelle gefertigt. Spanübertragung in Trennlinien 1 - 1000V in beliebiger Kombination.

Deckung in Klasse IP00.

Ausführung: in Höhe, Klemmleiste

Sonstige Ausführung muss mit unserer technischen Abteilung besprochen werden.

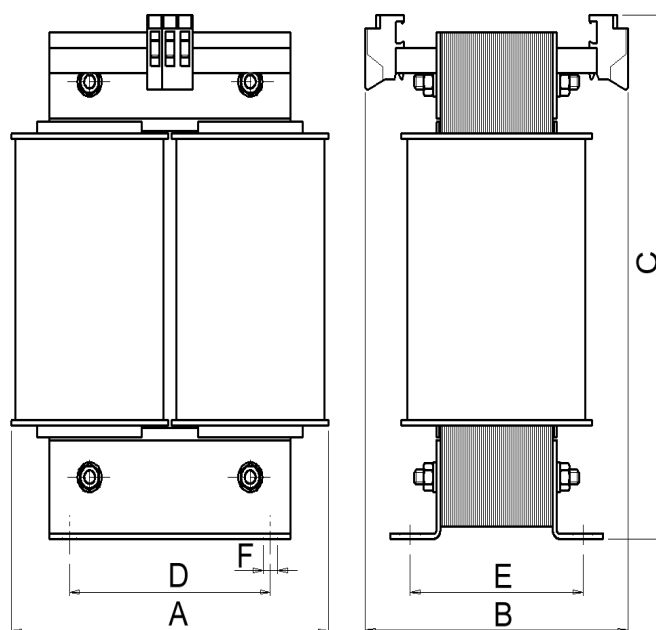

Type/Type	Dimensions/Abmessungen [mm]						Rated output /Leistung VA	Core area/ Kernquerschnitt cm ²	Core size/ Blechabmessung mm	Weight/Gewicht (informative) kg
	A	B	C	D	E	FxG				
U 3232	127	110	175	80	56	7x18	315	9,83	96x160	5,1
U 3240	127	120	175	80	64	7x18	500	12,30	96x160	5,9
U 3250	127	130	175	80	74	7x18	630	15,40	96x160	6,9
U 3256	127	136	175	80	80	7x18	630	17,30	96x160	7,1
U 4040	158	110	212	100	70	7x18	800	15,40	120x200	7,1
U 4050	158	120	212	100	80	7x18	1000	19,20	120x200	11,5
U 4056	158	135	212	100	86	7x18	1000	21,42	120x200	12,9
U 4060	158	140	212	100	90	7x18	1250	23,83	120x200	14,1



ELEKTROKOV, a.s. ZNOJMO

Kotkova 3582/19, 669 02 ZNOJMO, CR
 tel.: +420 515 200 004-5, fax: +420 515 200 034
 e-mail: obchodni@elektrov.cz, http://www.elektrov.cz

