


Three-phase transformers with FI alternately stacked lamination are produced with electrical output power and dimensions according to table below. Voltage transfer 1-1000 V in any combination. Covering IP 00.

Type :

W - terminal block like WAGO

Other variations are available upon discussion with the engineering department.

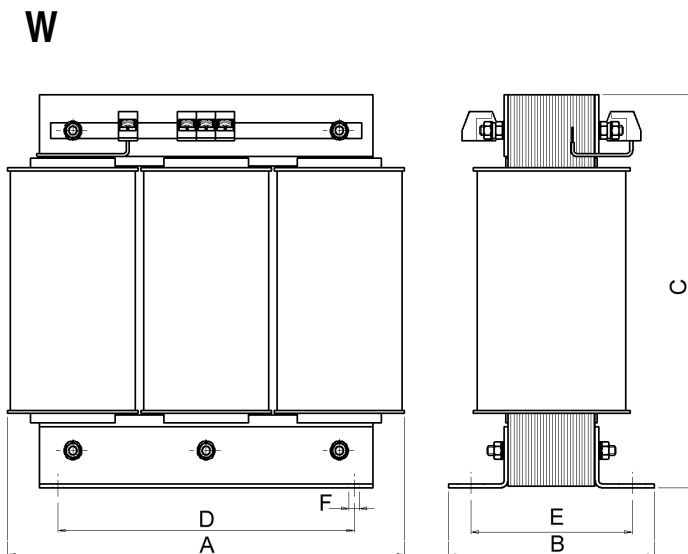

Type	Style	Dimensions [mm]						Rated output VA	Core c.s. area cm ²	Core size mm	Weight (informative) kg
		A	B	C	D	E	F				
F 3232	W	192	94	160	128	66	6,4	400	9,83	160x160	8,00
F 3240	W	192	102	160	128	74	6,4	600	12,29	160x160	10,20
F 3256	W	192	118	160	128	90	6,4	900	17,30	160x160	16,30
F 4545	W	267	127	250	200	97	6,4	2000	19,44	225x247	27,20
F 4556	W	267	138	250	200	108	6,4	2000	24,19	225x247	36,20
F 4564	W	267	146	250	200	120	6,4	2500	27,60	225x247	42,10
F 5056	W	298	140	278	220	108	6,4	3150	26,80	250x275	40,10
F 5064	W	298	148	278	220	116	6,4	3800	30,70	250x275	51,80
F 5080	W	298	164	278	220	132	6,4	4000	38,50	250x275	62,20
F 5670	W	336	174	310	240	132	8,4	5000	37,60	280x308	63,10
F 5680	W	336	184	310	240	142	8,4	6300	43,00	280x308	65,20