



Stabilized power supply units are designed for supply of wide range of electric appliances. It isn't switched type and therefore it isn't source of any electric interferences or electromagnetic interference. Cooling is realized by natural circulation. Input and output connecting to terminal blocks.

ZL - Mounting on strip TS 35. Realized on PCB with power transformer, covering IP20. Protection by fuse or electronic protection against short circuit and overheating. Function is indicated by green diode light.

ZL 40 - 24

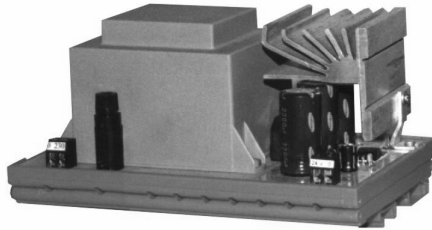

ZL 18 - 10

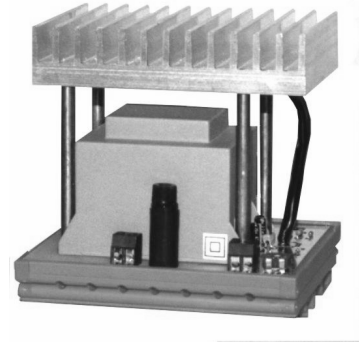

Type	Input	Output	Dimensions (š x v x h) mm	Weight kg	Mounting	Position	Protection
ZL 18-10	230 V AC	10-14V adjustable / 0 - 1,3 A DC	115x101x120	1,30	strip DIN I35		Protective fuse + electronic protection
ZL 40 - 24	230 V AC	24 V / 0 - 1,7 A	165x105x90	1,61	strip DIN 135	vertical for max. load	Protective fuse