


Three-phase transformers with **3EI** alternately stacked lamination are produced with electrical output power and dimensions according to table below. Voltage transfer 1-1000 V in any combination. Covering IP 00.

Type :

W - terminal blocks like WAGO

R - other terminal blocks (e.g. RSA)

Other variations are available upon discussion with the engineering department.

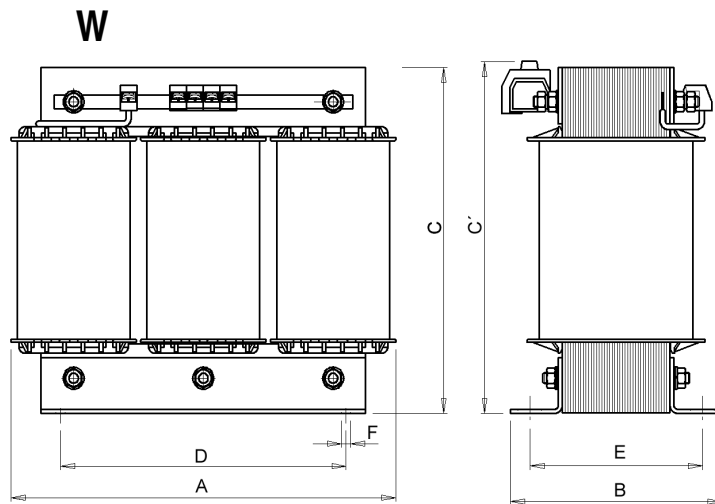

Type	Style	Dimensions [mm]							Rated output according to core duality VA			Core c. s. area cm <sup>2</sup>	Weight (informative) Kg
		C	C'	E	F	A	B	D	Ei 50	Ei 40	Eo 11		
<b>3x2020</b>									<b>90</b>			4,4	2,20
	W	120	-	53	6,2	120	80	80					
<b>3x2525</b>									<b>250</b>			6,9	3,80
	W	141	-	55	8	155	75	130					
<b>3x2540</b>									<b>330</b>			10,7	5,40
	W	141	-	71	8	155	91	130					
<b>3x4040</b>	R	210	225	75	10	240	100	180		<b>1100</b>	<b>1300</b>	15,40	15,90
	W	210	-	75	10	240	100	180					
<b>3x4050</b>	R	210	225	85	10	240	110	180		<b>1300</b>	<b>1550</b>	19,20	19,50
	W	210	-	85	10	240	110	180					
<b>3x4060</b>	R	210	225	95	10	240	120	180		<b>1500</b>	<b>1800</b>	22,90	25,00
	W	210	-	95	10	240	120	180					
<b>3x4066</b>	R	210	225	100	10	240	125	180		<b>1600</b>	<b>1900</b>	24,80	27,50
	W	210	-	100	10	240	125	180					
<b>3x4070</b>	R	210	225	105	10	240	130	180		<b>1700</b>	<b>2050</b>	26,60	30,80
	W	210	-	105	10	240	130	180					
<b>3x4075</b>	R	210	225	110	10	240	135	180		<b>1800</b>	<b>2200</b>	29,60	31,90
	W	210	-	110	10	240	135	180					
<b>3x5052</b>	R	255	260	104	7x18	294	134	220		<b>2900</b>		25,00	32,50
	W	255	-	104	7x18	294	134	220					
<b>3x5077</b>	R	255	260	129	7x18	294	159	220		<b>3150</b>		37,00	40,10
	W	255	-	129	7x18	294	159	220					
<b>3x50103</b>	R	255	260	155	7x18	294	185	220		<b>4000</b>		49,50	58,00
	W	255	-	155	7x18	294	185	220					